



Rec'd PCT/PTO 31, MAR-2005 #2



INVESTOR IN PEOPLE

PCT/BG03/4253

The Patent Office

Concept House

Cardiff Road

Newport

South Wales

NP10 8QQ

REC'D 06 NOV 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*P. Mahoney*


Dated

28 October 2003

BEST AVAILABLE COPY

**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1/77

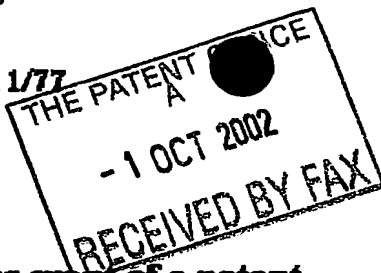Patents Act 1977  
(Rule 16)The  
Patent  
Office02-E752050-1 663975  
PO 0.00-0222632.2**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

02.073-lpw/ph

2. Patent application number

(The Patent Office will fill in this part)

0222632.2

-1 OCT 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

IPWireless, Inc.  
1001 Bayhill Drive, 2nd Floor  
San Bruno, California  
CA 94066

Patents ADP number (If you know it)

8169401002

If the applicant is a corporate body, give the country/state of its incorporation

USA, Delaware

4. Title of the invention

ARRANGEMENT AND METHOD FOR SESSION CONTROL IN  
WIRELESS COMMUNICATION NETWORK

5. Name of your agent (If you have one)

Peter Hudson

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

InetIP  
121 Blackberry Lane  
Four Marks, Alton  
Hampshire GU34 5DJ

Patents ADP number (If you know it)

7987431001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (If you know it) the or each application number

Country

Priority application number  
(If you know it)Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if

Yes

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

0048626 01-Oct-02 12:25

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	19
Claim(s)	7
Abstract	1
Drawing(s)	10 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 8/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

2 X not filed  
1 X not filed

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

Peter D. Hudson

1 October 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Peter Hudson

01420 562568

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

02.073-ipw

- 1 -

ARRANGEMENT AND METHOD FOR SESSION CONTROL IN WIRELESS  
COMMUNICATION NETWORK

5 **Field of the Invention**

This invention relates to session control in communication networks, and particularly (though not exclusively) wireless networks such as UMTS 3G (Universal  
10 Mobile Telecommunication System 3<sup>rd</sup> Generation) mobile wireless networks.

**Background of the Invention**

15

In the field of this invention it is known that the UMTS specifications:

- [1] 3GPP TS 23.107 - 3rd Generation Partnership  
Project; Technical Specification Group Services  
20 and System Aspects; QoS Concept and Architecture  
(Release 1999)"
- [2] 3GPP TS 27.007 - 3rd Generation Partnership  
Project; Technical Specification Group Terminals;  
AT command set for User Equipment (UE) (Release  
25 1999)"
- [3] 3GPP TS 23.057 - 3rd Generation Partnership  
Project; Technical Specification Group Terminals;  
Mobile Station Application Execution Environment  
(MExE); Functional description; Stage 2 (Release  
30 1999) and

02.073-ipw

- 2 -

[4] 3GPP TS 24.008 - 3rd Generation Partnership  
Project; Technical Specification Group Core  
Network; Mobile radio interface layer 3  
specification; Core Network Protocols - Stage 3  
6 (Release 1999)

work on the principle that data packets for different  
data flows relating to specific services, are carried  
over separate packet sessions over the air. For example,  
streaming audio packets could be carried over one packet  
10 session, web browsing over another, email download over  
another, etc. The logic for this is that different QoS  
parameters (bandwidth, latency etc.) can be applied to  
the different services being used.

15 The UMTS standards [1] define 4 'classes' of packet  
flows, based on 4 categories of applications:

- Conversational class (e.g., interactive voice /  
video)
- Streaming class (e.g., streaming media such as  
20 Internet radio, or streaming video)
- Interactive class (e.g., web browsing)
- Background class (e.g., email download).

The corollary of this is that the wireless network needs  
25 to know when particular services are being used, so that  
it can correctly route data packets for each session over  
the relevant packet session over the air.

The UMTS standards imply a tight coupling between the  
30 applications and the mobile device, whereby the  
applications inform the mobile device (UE) that they are

02.073-ipw

- 3 -

starting up, and what are the QoS characteristics of the traffic they will be sending / receiving. This will either be a direct, software interface in the case of integrated mobile devices as in standards [3] or can be  
5 an AT command interface as in standards [2].

However, the problem with the approach in the current set of UMTS specifications is that they require special versions of application software (email clients, web  
10 browsers, video streaming clients, etc.) to implement an (internal or external) interface to the UE. A standard PC (Personal Computer), when connected to a UE, with standard applications, will not support such an interface and therefore cannot support packet flows of different  
15 QoS for different applications, as demanded by the standards.

A need therefore exists for arrangement and method for session control in wireless communication network wherein  
20 the abovementioned disadvantage(s) may be alleviated.

Stateful inspection is an existing, well-known technology, used in Internet firewalls - a firewall blocks packets coming into or out of a network, except  
25 those explicitly allowed. Stateful inspection is a process whereby the firewall inspects packets flowing into it, implies the state of an application-specific packet session via the control packets, then allows data packets for that session to flow through the firewall, if  
30 the policy for flows of that type allow it.

02.073-ipw

- 4 -

The basic example of stateful inspection is the allowing through of TCP (Transmission Control Protocol) sessions originated from inside the firewall to an IP (Internet Protocol) address on the outside to be allowed, but TCP  
6 sessions from outside to be blocked - this is the mechanism that allows through web browsing and FTP (File Transfer Protocol) requests from the inside of a firewall, but blocks requests from the outside to web servers inside the firewall.

10

This is done by catching TCP connection request packets (packets originating from inside the firewall with the 'SYN' flag set), starting the TCP '3-way handshake' (as explained, for example, in Chapter 18 of "TCP/IP  
15 Illustrated, Volume 1, The Protocols" authored by W. Richard Stevens and published by Addison Wesley), then opening up the source and destination IP addresses and TCP port numbers, forwarding on the packet to the outside and then monitoring the subsequent TCP control packets to  
20 ensure the connection came up and also to catch the eventual tear-down of the TCP session.

Another example of stateful inspection in firewalls for a UDP-based (User Datagram Protocol-based) service is to  
25 allow voice over IP (VoIP) calls through the firewall. In this example, incoming VoIP call-control messages are inspected and parsed to reveal the VoIP end-points (IP address and port number) and allow voice data packets through the firewall.

30

02.073-ipw

- 5 -

**Statement of Invention**

In accordance with a first aspect of the present invention there is provided an arrangement for session  
5 control in a wireless communication network as claimed in claim 1.

In accordance with a second aspect of the present invention there is provided a method for session control  
10 in a wireless communication network as claimed in claim 19.

**Brief Description of the Drawings**

15

One arrangement and method for session control in a wireless communication network incorporating the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

20

FIG. 1 shows a schematic diagram illustrating prior art data flow across an Internet network firewall between an inside host and an outside host, and showing set-up and tear-down of a session;

25

FIG. 2 shows a schematic diagram illustrating prior art VoIP data flow across an Internet network firewall between a PC and an Internet Protocol telephone set and showing set-up and tear-down;

30



02.073-ipw

- 6 -

FIG. 3 shows a schematic diagram of an arrangement illustrating application of stateful inspection to UMTS session management, in the context of POP3 email download, which is mapped to a 'background class' PDP context, in accordance with the present invention;

FIG. 4 shows a block schematic diagram illustrating flow of data packets in a default PDP context of the arrangement of FIG. 3;

FIG. 5 shows a block schematic diagram illustrating detection of email download session control packets to activate a secondary PDP context for the email download session in the arrangement of FIG. 3;

FIG. 6 shows a block schematic diagram illustrating flow of email packets and other data packets, and their respective processing as two parallel contexts, during the email download session in the arrangement of FIG. 3;

FIG. 7 shows a schematic diagram of an arrangement, similar to FIG. 3, illustrating the use of simultaneous default and secondary PDP contexts to provide separate PDP contexts for the email and data packets of FIG. 6;

FIG. 8 shows a block schematic diagram illustrating flow of data packets in a default PDP context;

02.073-ipw

- 7 -

FIG. 9 shows a block schematic diagram illustrating detection of VoIP session control packets to activate a secondary PDP context for controlling a VoIP session;

5

FIG. 10 shows a block schematic diagram illustrating flow of VoIP session control packets, VoIP packets and other packets, and their respective processing as two parallel contexts, during a VoIP session;

10

FIG. 11 shows a block schematic diagram of a UMTS network, in which packet sessions (PDP contexts) are created between UE and SGSN and forwarded on through to the GGSN, where the various packet sessions are bonded back together and connected to the target network (e.g., the Internet) in a single packet stream, in accordance with the invention;

15

FIG. 12 shows a block schematic diagram illustrating UE packet flow architecture in an uplink direction, in accordance with the invention, in the network of FIG. 11; and

20

FIG. 13 shows a block schematic diagram illustrating UE packet flow architecture in a downlink direction in accordance with the invention, in the network of FIG. 11.

25

02.073-ipw

- 8 -

**Description of Preferred Embodiment(s)**

Referring firstly to FIG. 1, a known Internet network firewall 10 intermediates between an inside host 20 and an outside host 30. Operation of the firewall 10 is as follows:

- At (1), session set-up begins when an outgoing TCP connection detected. The firewall 10 is opened up for remote IP address and source and destination TCP port numbers, and waits for a SYN response; a session object created by a stateful inspector (not shown).
- At (2), the end of 3-way handshake detected, and 2-way TCP session packets are allowed to flow.
- At (3), the start of TCP connection tear-down detected with a FIN packet from the inside host 20.
- At (4), the TCP session teardown is complete, and far end IP address & session TCP port numbers are blocked by the firewall 10.

Referring now to FIG. 2, a known Internet network firewall 110 intermediates VoIP data flow between a PC (Personal Computer) 120 and an Internet Protocol telephone set 130. Operation of the firewall 110 is as follows:

- At (1), session set-up begins when an outgoing SIP session request (INVITE) is detected. The firewall 110 is opened up for remote IP address and source and destination port numbers for SIP control messages, and waits for an ACK response; a session object is created by a stateful inspector (not shown).

02.073-ipw

- 9 -

- At (2), a successful ACK is received, and UDP source and destination port numbers are opened up for an RTP session, based on fields parsed out of INVITE and ACK messages. 2-way UDP voice session packets  
5 are allowed to flow.
- At (3), start of SIP connection tear-down is detected.
- At (4), SIP session teardown is complete, and far end IP address and session UDP port numbers are  
10 blocked by the firewall 110.

However, the firewalls 10 and 110 are known only in fixed-line, i.e., wired, applications.

- 15 The UMTS standards define 4 'classes' of packet flows, based on 4 categories of applications (conversational class - e.g., interactive voice / video; streaming class - e.g., streaming media such as Internet radio, or streaming video; interactive class - e.g., web browsing;  
20 and background class - e.g., email download).

The wireless network therefore needs to know when particular services are being used, so that it can correctly route data packets for each session over the  
25 relevant packet session over the air.

The UMTS standards imply a tight coupling between the applications and the mobile device, whereby the applications inform the mobile device (UE) that they are  
30 starting up, and what are the QoS characteristics of the traffic they will be sending / receiving. This will

02.073-ipw

- 10 -

either be a direct, software interface in the case of integrated mobile devices as in standards, or can be an AT command interface as in standards.

5 However, the problem with the approach in the current set of UMTS specifications is that they require special versions of application software (email clients, web browsers, video streaming clients, etc.) to implement an (internal or external) interface to the UE. A standard PC  
10 (Personal Computer), when connected to a UE, with standard applications, will not support such an interface and therefore cannot support packet flows of different QoS for different applications, as demanded by the standards.

15

In a preferred embodiment, the present invention overcomes this drawback by applying Stateful Inspection to UMTS Session Management.

20 Briefly stated, in a preferred embodiment, stateful inspection is used in a UTRA (UMTS Terrestrial Radio Access) system to examine the data packets, to detect the existence of different application-specific packet flows, which then allows packet-sessions, called PDP (Packet  
25 Data Protocol) contexts in the UMTS standards, to be created over the air with the required QoS parameters.

The UE brings up a default PDP context for basic data service; all packets are then inspected, both incoming  
30 and outgoing, and application-specific traffic is used to open-up dedicated PDP contexts to carry that traffic.

02.073-ipw

- 11 -

One example of how this is used is detection of a POP3 email download, mapping it to a 'background class' PDP context.

6

As depicted in FIG. 3, a PC 210 (generally referred to as TE - Terminal Equipment - in UMTS terminology) is coupled, via R interface 215, to UMTS UE 220 (containing a USIM - not shown - which together with the UE forms MT  
10 - Mobile Terminal - in UMTS terminology). The UE 220 is coupled through the UMTS radio access and core network 230 via at least a default PDP context 240. The UMTS radio access and core network 230 is coupled via a Gi reference point 250) to the Internet 260, containing an  
15 email server 270.

Referring now also to FIG. 4, FIG. 5 and FIG. 6, the UE 220 contains a stateful inspection session monitor 280.

20 As shown in FIG. 4, the stateful inspection session monitor 280 monitors packets 290 on the default PDP context 240, looking for email download control messages. In the absence of an email download control message, the UE 220 processes the data packets 290 through RLC (Radio  
25 Link Controller) 300, MAC (Medium Access Controller) 310 and CDMA (Time-Division Code-Division-Multiple-Access) physical air interface 320 in known manner.

As shown in FIG. 5, when the stateful inspection session  
30 monitor 280 detects an email download control message 330, it causes a session manager 340 to activate a

02.073-ipw

- 12 -

secondary PDP context 350. In the activated secondary PDP context 350, the email download control packet(s) are processed through RRC (Radio Resource Controller) 360, RLC 370, MAC 380 and CDMA physical air interface 390 in  
5 known manner.

As shown in FIG. 6, after activation of the secondary PDP context 350, data packets 290 and email packets 400 are processed in parallel in separate PDP contexts as  
10 follows:

- data packets 290 are processed in default PDP context 240, and
- email packets 400 are processed in PDP context 350.

15 Thus, as shown in in FIG. 7, the email download session is conducted between the email server 270 and an email program 410 (running on the PC 210) via the PDP context 350, while the default PDP context 240 continues to process data packets as before.

20

Referring now to FIG. 8, FIG. 9 and FIG. 10, another example application of the present invention, is a VoIP session initiation using SIP (as in 3GPP RFC - Request For Comments - 3261 "SIP: Session Initiation Protocol",  
25 June 2002) which is mapped into a conversational class PDP context to carry the VoIP traffic and an interactive class PDP context to carry the VoIP signalling.

As shown in FIG. 8, the stateful inspection session  
30 monitor 280 monitors packets 290 on the default PDP context 240, looking for VoIP session control packet(s).

02.073-ipw

- 13 -

In the absence of a VoIP session control packet, the UE 220 processes the data packets 290 through RLC (Radio Link Controller) 300, MAC (Medium Access Controller) 310 and CDMA (Time-Division Code-Division-Multiple-Access) 5 physical air interface 320 in known manner.

As shown in FIG. 9, when the stateful inspection session monitor 280 detects VoIP session control packet(s) 420, it causes session manager 340 to activate a secondary PDP 10 context 350. In the activated secondary PDP context 350, the VoIP session control packet (s) are processed through RRC (Radio Resource Controller) 360, RLC 370, MAC 380 and CDMA processor 390 in known manner. Referring now also to FIG. 10, detection of VoIP session control packet(s) also 15 causes SM 340 to activate a further secondary PDP context 430.

As shown in FIG. 10, after activation of the secondary PDP context 350 and the further secondary PDP context 20 430, packets are processed in parallel in three PDP contexts as follows:

- data packets 290 are processed in default PDP context 240,
- VoIP control packets 420 are processed in PDP 25 context 350, and
- VoIP packets are processed in PDP context 430.

Taking the specific example of the Session Initiation Protocol [RFC 3261 - SIP: Session Initiation Protocol, 30 June 2002] the QoS parameters required for a particular



02.073-ipw

- 14 -

VoIP session can be derived or inferred from the SIP signalling.

A request to set up a session is contained in an INVITE message, e.g.

```
INVITE sip:UserB@there.com SIP/2.0
Via: SIP/2.0/UDP here.com:5060
From: BigGuy
To: LittleGuy
10 Call-ID: 12345601@here.com
   CSeq: 1 INVITE
   Contact:
   Content-Type: application/sdp
   Content-Length: 147
15
   v=0
   o=UserA 2890844526 2890844526 IN IP4 here.com
   s=Session SDP
   c=IN IP4 100.101.102.103
20   t=0 0
   m=audio 49172 RTP/AVP 4
   a=rtpmap:4 G723/8000
```

In this case the 'c=' parameter identifies the IP address of the caller, the 'm=' parameter identifies this as an RTP audio stream with local UDP port number and the 'a=' parameter identifies the characteristics (bandwidth, encoding) of the audio stream.

30 The response message indicating answer to this might be:  
SIP/2.0 200 OK

02.073-ipw

- 15 -

Via: SIP/2.0/UDP here.com:5060  
From: BigGuy  
To: LittleGuy ;tag=8321234356  
Call-ID: 12345601@here.com  
5 CSeq: 1 INVITE  
Contact:  
Content-Type: application/sdp  
Content-Length: 147  
  
10 v=0  
o=UserB 2890844527 2890844527 IN IP4 there.com  
s=Session SDP  
c=IN IP4 110.111.112.113  
t=0 0  
15 m=audio 3456 RTP/AVP 4  
a=rtpmap:4 G723/8000

In this case the 'c=' parameter identifies the IP address  
of the called party, the 'm=' parameter identifies this  
20 as an RTP audio stream with a type 4 (6.3 kbit/s G.723.1)  
codec & local UDP port number of the called party and the  
'a=' parameter identifies the characteristics of the  
audio stream - basically the codec.

25 Finally the ACK message sent by the caller looks like:

ACK sip:UserB@there.com SIP/2.0  
Via: SIP/2.0/UDP here.com:5060  
From: BigGuy  
30 To: LittleGuy ;tag=8321234356  
Call-ID: 12345601@here.com

02.073-ipw

- 16 -

CSeq: 1 ACK

So, by this time the source and destination IP addresses and port numbers + the bandwidth required are known -  
5 basically enough to set-up a secondary PDP context to send the packets through.

It will be understood that the application of stateful inspection of packet flows to control UMTS session  
10 management as described in the examples above presents a new and advantageous technique providing a UE interface allowing packet flows of different QoS for different applications to be supported simultaneously and in parallel, without requiring special versions of  
15 application software (email clients, web browsers, video streaming clients, etc.).

Referring now to FIG. 11, viewed in the context of the UTRA system of FIG. 3 or FIG. 7, the VoIP example  
20 described above in relation to FIG. 8, FIG. 9 and FIG. 10 can be considered as:

- (i) in the UE (220), detecting application-specific session initiation (incoming or outgoing) and setting up secondary PDP contexts to carry  
25 application packet streams (350 and 430), and
- (ii) in GGSN 230C, GTP (GPRS Tunneling Protocol) sessions from SGSN 230B extending the PDP contexts all the way to the GGSN. The GGSN can use the per-PDP context QoS parameters (and any  
30 other criteria it sees fit) to classify the IP traffic going into the target IP network.

02.073-ipw

- 17 -

Thus, in a UMTS network, packet sessions (PDP contexts) are created between the UE and the SGSN (via the Node B - not shown - and RNC 230A) and forwarded on through to the  
5 GGSN, where the various packet sessions are bonded back together and connected to the target network (e.g. the Internet) in a single packet stream.

It will be understood that although the invention has  
10 been described in the above examples with reference to email (POP3) and VoIP sessions, the invention covers additional or alternative sessions such as:

'conversational' class (e.g., Video over IP) where traffic may be based on originated calls controlled by  
15 SIP or H.323 protocol; 'streaming' class (e.g., carrying streaming media traffic controlled by Real Time Streaming Protocol); 'interactive' class; or 'background' class (e.g., carrying POP3 or SMTP traffic).

20 It will be understood that stateful inspector and packet filter entities exist within the UE; these may be implemented in software, firmware or hardware. The stateful inspector fits in the uplink and downlink packet flow, the packet filter fits in the uplink packet flow  
25 (in order to control the split of uplink packets into the correct PDP context). A session management software entity exists within the UE; it controls the activation and de-activation of PDP contexts. The relationship between stateful inspector, packet filter and session  
30 management is illustrated in the FIG. 12 and FIG. 13

02.073-ipw

- 18 -

Referring now to FIG. 12 and FIG. 13, which show uplink and downlink packet flow architectures respectively in the UE (220 or 130A):

5 The stateful inspector 450:

- Detects application-specific control messages in the uplink and the downlink.
- Implements an interface to the session management entity 460 to control activation / deactivation of application-specific PDP contexts, including sufficient information regarding the IP packet flow for that instance of that application (source / destination IP address, UDP/TCP indicator and source / destination port number).
- 15 • Implements an interface from session manager 460 to inform it of timed-out sessions.

Session manager 460:

- Implements the interface from the stateful inspector 20 450 to initiate activation / de-activation of secondary PDP contexts.
- Controls the activation / de-activation of secondary (application-specific) PDP contexts over the UMTS air interface.
- 25 • Implements an interface to add / delete with uplink packet-flow filters in the packet filter entity 470 (source / destination IP address, UDP/TCP indicator and source / destination port number).

30 The packet filter 470:

02.073-ipw

- 19 -

- Implements the interface from session manager 460 to add / remove packet filters and associate them to secondary PDP contexts in the uplink.

5 It will be appreciated that the method described above for session management in a UMTS radio access network may be carried out in software running on a processor (not shown), and that the software may be provided as a computer program element carried on any suitable data  
10 carrier (also not shown) such as a magnetic or optical computer disc.

It will be also be appreciated that the method described above for session management in a UMTS radio access  
15 network may alternatively be carried out in hardware, for example in the form of an integrated circuit (not shown) such as an FPGA (Field Programmable Gate Array) or ASIC (Application Specific Integrated Integrated Circuit).

20 It will be understood that the arrangement and method for session control in a wireless communication network described above provides the advantage of allowing session set-up and tear-down control of dedicated packet sessions for particular data services, in a UMTS 3G  
25 mobile wireless network, with application-specific QoS parameters, without the explicit cooperation of the application software (either via software API or modem AT command).

02.073-ipw

- 20 -

**Claims**

1. An arrangement for session control in a wireless communication network, comprising:
  - 5 means for detecting application-specific packets in a packet stream; and
  - means for activating, in response to the means for detecting, a plurality of packet sessions with application-specific QoS parameters, without
  - 10 requiring explicit cooperation of application software.
2. The arrangement of claim 1 further comprising means for deactivating at least one of the plurality of packet
- 15 sessions.
3. The arrangement of claim 1 or 2 wherein the wireless communication network comprises a UMTS radio access network.
- 20 4. The arrangement of claim 1, 2 or 3 wherein the packet sessions comprise Packet Data Protocol (PDP) contexts.
- 25 5. The arrangement of any one of claims 1-4 wherein the means for detecting comprises stateful inspection means, and the arrangement further comprises session manager means and packet filter means responsive to the stateful inspection means.

30

02.073-ipw

- 21 -

6. The arrangement of any one claims 1-5, wherein the means for detecting is arranged to inspect uplink packet flows to detect application-specific packet flows, via application-specific control messages.

5

7. The arrangement of any one claims 1-6, wherein the means for detecting is arranged to inspect downlink packet flows to detect application-specific packet flows, via application-specific control messages.

10

8. The arrangement of any one claims 1-7, wherein the packet sessions comprise conversational class PDP contexts.

15 9. The arrangement of claim 8, wherein the conversational class PDP contexts are arranged to carry Voice over IP (VoIP) traffic.

20 10. The arrangement of claim 8, wherein the conversational class PDP contexts are arranged to carry Video over IP traffic.

25 11. The arrangement of claim 9 or 10 wherein the traffic is based on originated calls controlled by Session Initiation Protocol (SIP).

12. The arrangement of claim 9 or 10 wherein the traffic is based on originated calls controlled by H.323 protocol.

30



02.073-ipw

- 22 -

13. The arrangement of any one claims 1-7, wherein the packet sessions comprise streaming class PDP contexts.

14. The arrangement of claim 13, wherein the streaming  
5 class PDP contexts are arranged to carry streaming media traffic controlled by Real Time Streaming Protocol.

15. The arrangement of any one claims 1-7, wherein the packet sessions comprise interactive class PDP contexts.

10

16. The arrangement of any one claims 1-7, wherein the packet sessions comprise background class PDP contexts.

17. The arrangement of claim 16, wherein the background  
15 class PDP contexts are arranged to carry Post Office Protocol - Version 3 (POP3) traffic.

18. The arrangement of claim 16, wherein the background  
class PDP contexts are arranged to carry Simple Mail  
20 Transfer Protocol (SMTP) traffic.

02.073-ipw

- 23 -

19. A method for session control in a wireless communication network, comprising:

detecting application-specific packets in a packet stream; and

5 activating, in response to the step of detecting, a plurality of packet sessions with application-specific QoS parameters, without requiring explicit cooperation of application software.

10 20. The method of claim 19 further comprising deactivating at least one of the plurality of packet sessions.

21. The method of claim 19 or 20 wherein the wireless  
15 communication network comprises a UMTS radio access network.

22. The method of claim 19, 20 or 21 wherein the packet  
sessions comprise Packet Data Protocol (PDP) contexts.

20

23. The method of any one of claims 19-22 wherein the  
step of detecting comprises detecting in a stateful  
inspector, and the method further comprises providing a  
session manager and a packet filter responsive to the  
25 stateful inspection means.

24. The method of any one claims 19-23, wherein the step  
of detecting comprises inspecting uplink packet flows to  
detect application-specific packet flows, via  
30 application-specific control messages.

02.073-ipw

- 24 -

25. The method of any one claims 19-23, wherein the step of detecting comprises inspecting downlink packet flows to detect application-specific packet flows, via application-specific control messages.
- 5
26. The method of any one claims 19-25, wherein the packet sessions comprise conversational class PDP contexts.
- 10
27. The method of claim 26, wherein the conversational class PDP contexts carry Voice over IP (VoIP) traffic.
28. The method of claim 26, wherein the conversational class PDP contexts carry Video over IP traffic.
- 15
29. The method of claim 27 or 28 wherein the traffic is based on originated calls controlled by Session Initiation Protocol (SIP).
- 20
30. The method of claim 27 or 28 wherein the traffic is based on originated calls controlled by H.323 protocol.
31. The method of any one claims 19-25, wherein the packet sessions comprise streaming class PDP contexts.
- 25
32. The method of claim 31, wherein the streaming class PDP contexts carry streaming media traffic controlled by Real Time Streaming Protocol.
- 30
33. The method of any one claims 19-25, wherein the packet sessions comprise interactive class PDP contexts.

02.073-ipw

- 25 -

34. The method of any one claims 19-25, wherein the packet sessions comprise background class PDP contexts.

5 35. The method of claim 34, wherein the background class PDP contexts carry Post Office Protocol - Version 3 (POP3) traffic.

10 36. The method of claim 34, wherein the background class PDP contexts carry Simple Mail Transfer Protocol (SMTP) traffic.

37. The method of any one of claims 19-36, wherein the method is performed in User equipment (UE).

15

38. User equipment (UE) for use in a UTRA system, the user equipment comprising the arrangement of any one of claims 1-18.

20 39. An integrated circuit comprising the arrangement of any one of claims 1-18.

40. A computer program element comprising computer program means for the method of any one of claims 19-37.

25

41. An arrangement, for session control in a wireless communication network, substantially as hereinbefore described with reference to FIGS. 3-13 of the accompanying drawings.

30

02.073-ipw

- 26 -

42. A method, for session control in a wireless communication network, substantially as hereinbefore described with reference to FIGS. 3-13 of the accompanying drawings.

02.073-ipw

- 27 -

**Abstract**

ARRANGEMENT AND METHOD FOR SESSION CONTROL IN WIRELESS  
COMMUNICATION NETWORK


5

An arrangement and method for session control in a wireless UMTS radio access network (100) by performing creation and deletion of application-specific packet sessions (PDP contexts) in the network, with application-specific QoS parameters, without requiring the explicit cooperation of the application software (either via software API or modem AT command).

This allows session set-up and tear-down control of dedicated packet sessions for particular data services, in a UMTS 3G mobile wireless network, with application-specific QoS parameters, with unmodified applications operating over the network.

02.073ipw


1/10

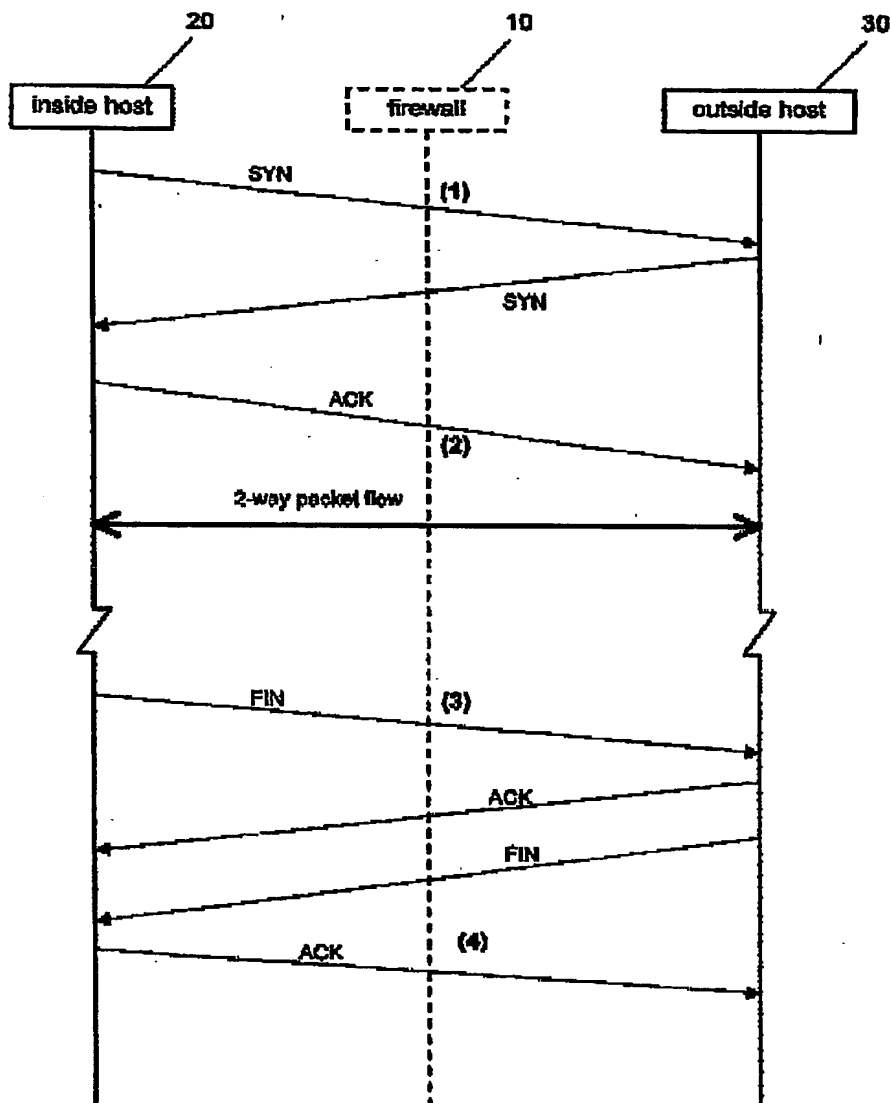

**FIG. 1**  
**Prior Art**

02.073ipw

2/10

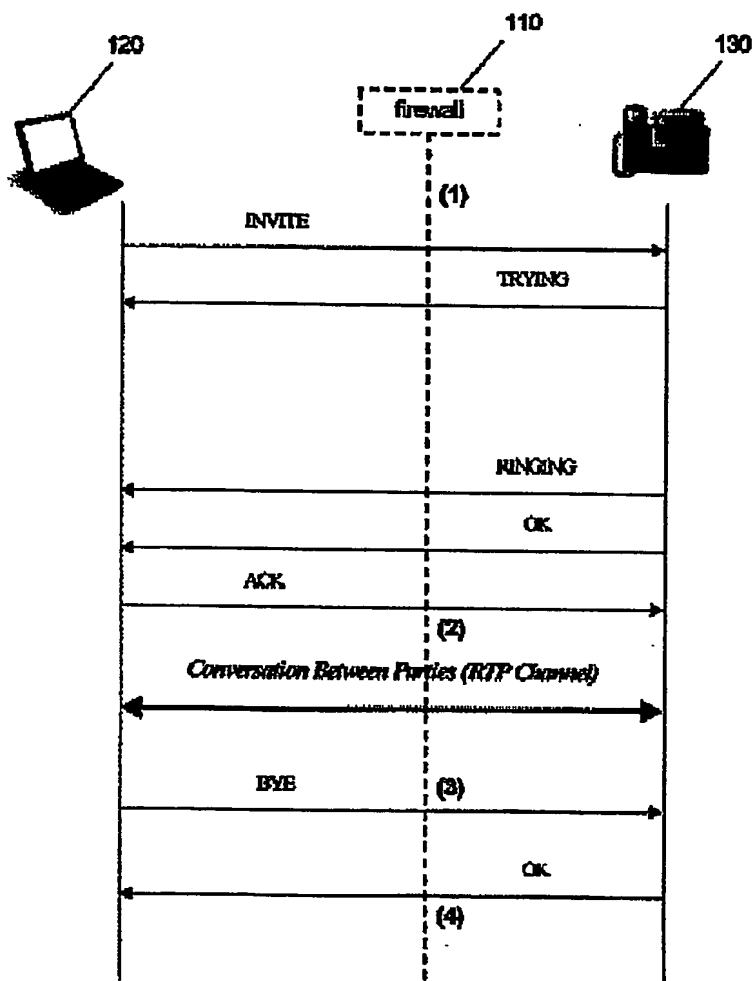

**FIG. 2**  
**Prior Art**



02.073-ipw

3/10

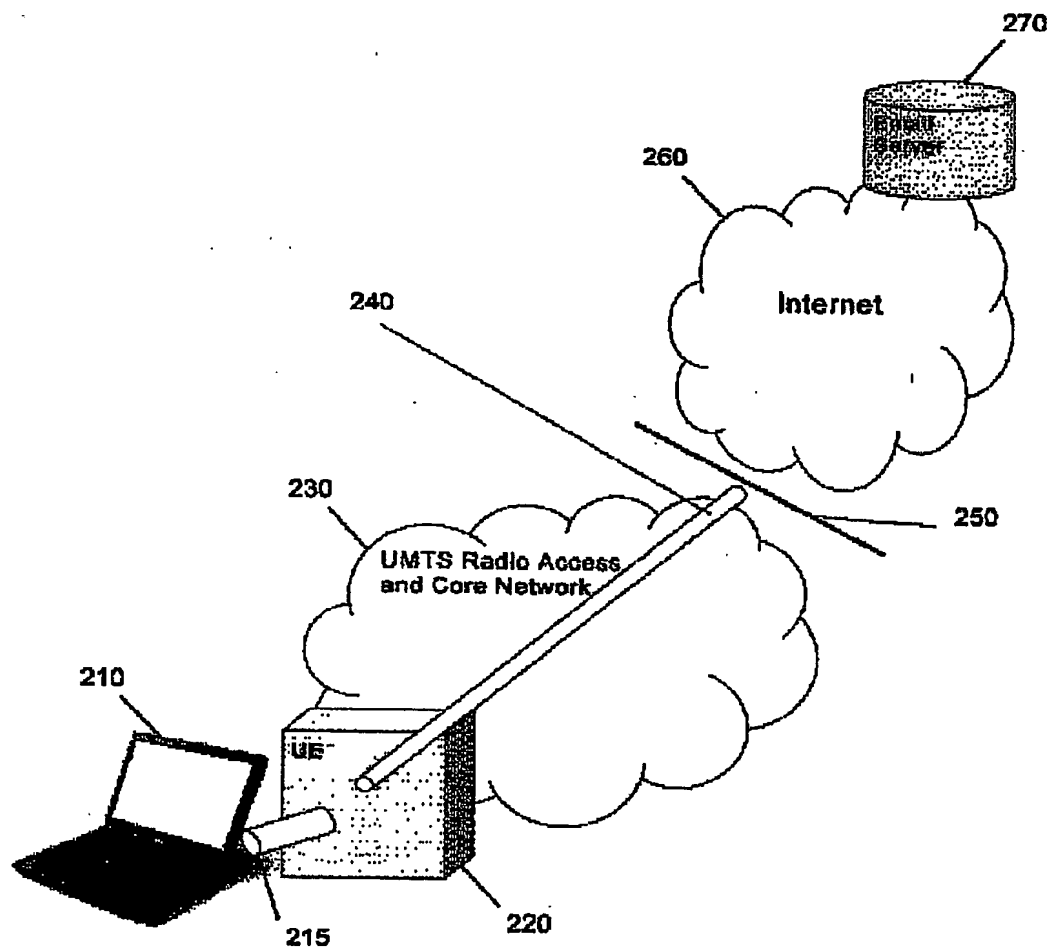


FIG. 3

02.073-ipw

4/10

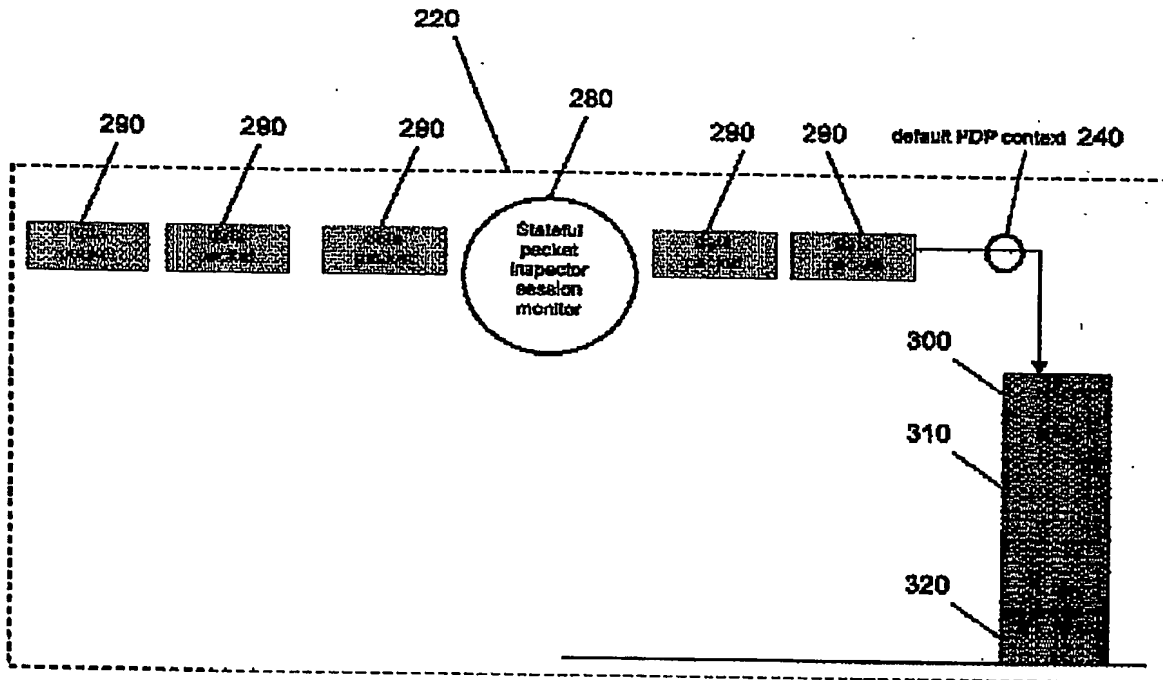


FIG. 4

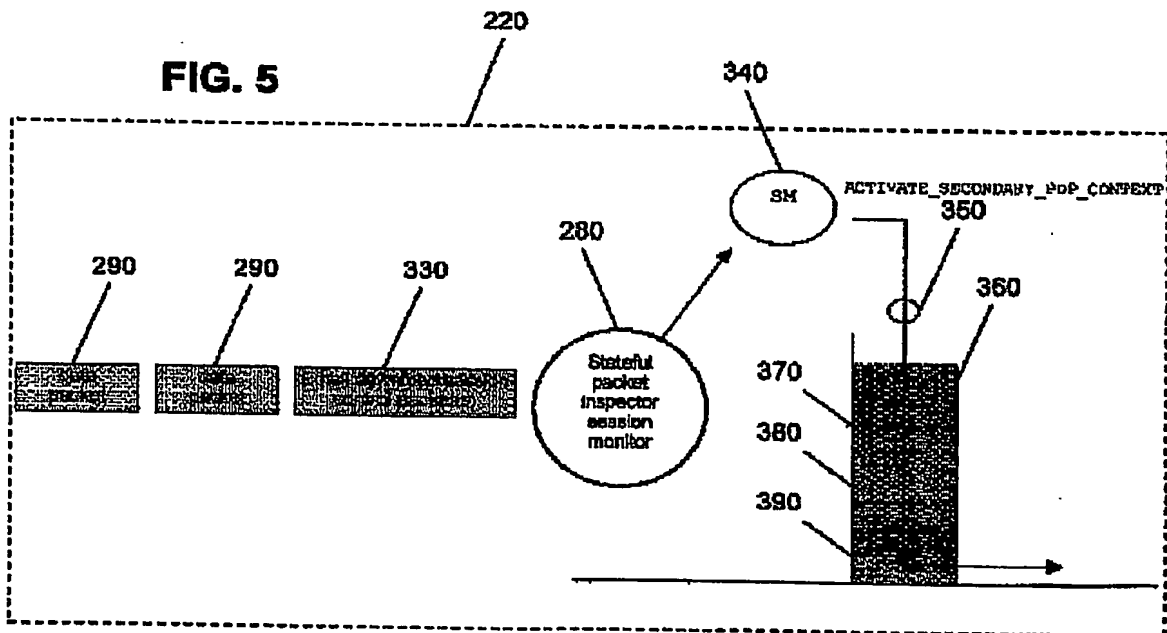


FIG. 5

5/10

02.073-1pw


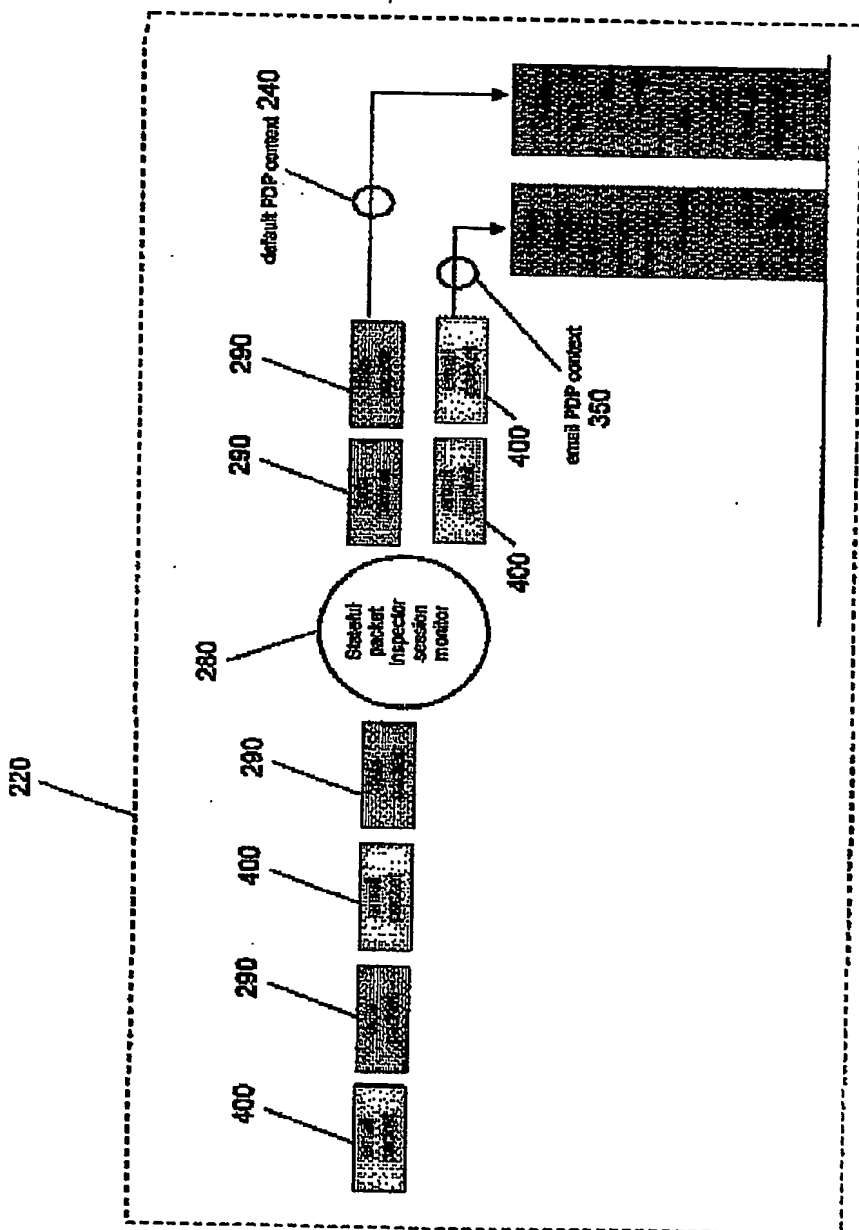


FIG. 6

02.073-ipw



6/10

FIG. 7

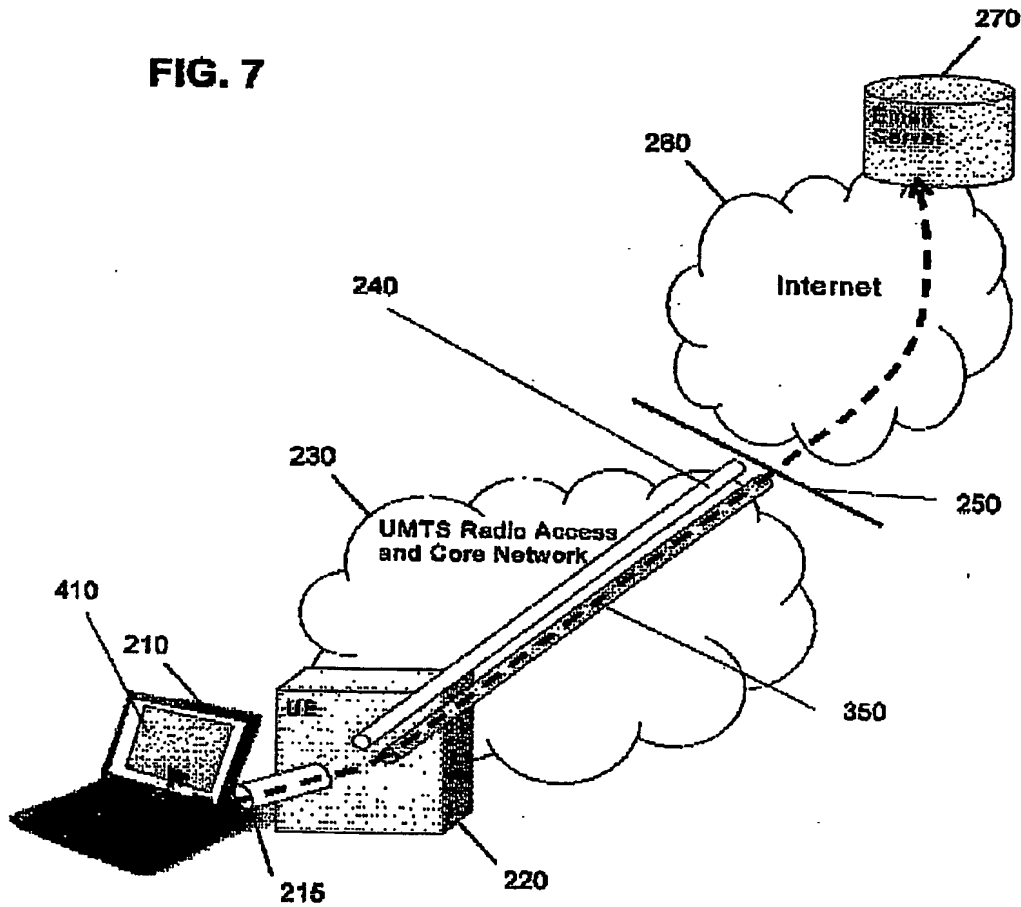

02.073-1pw

7/10

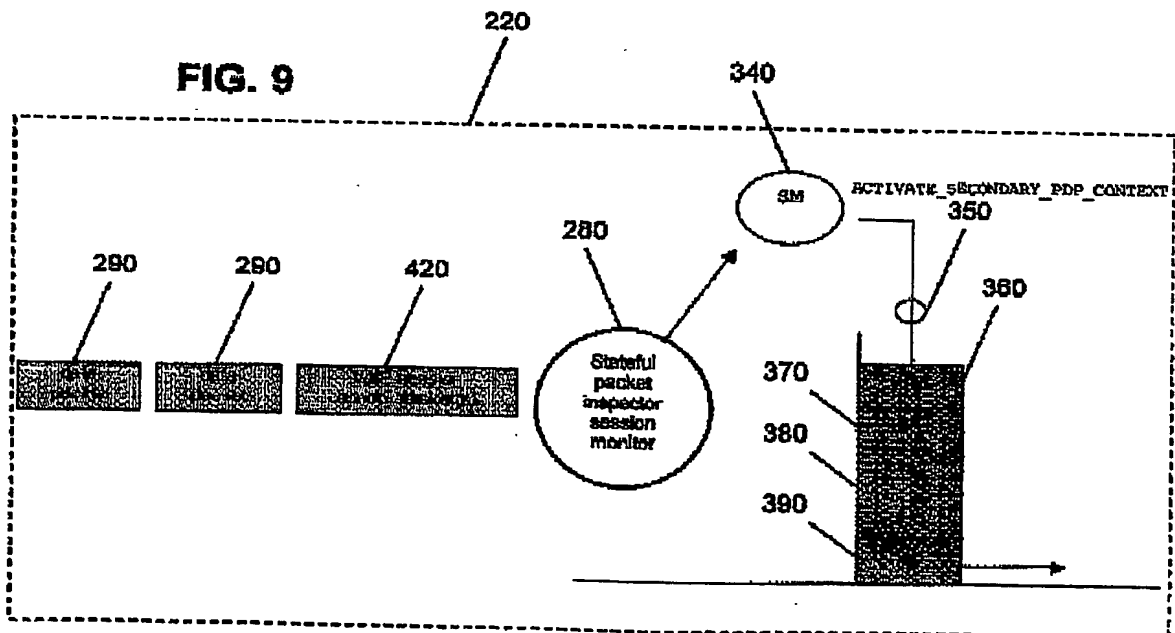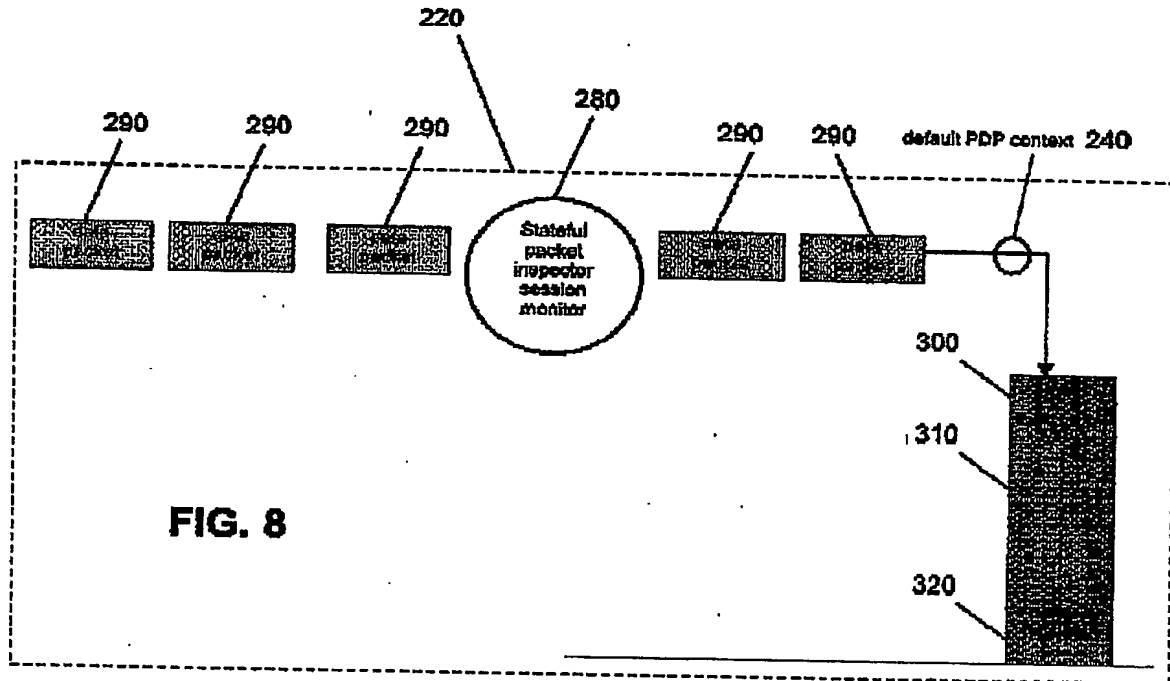

8/10

02.073-ipw

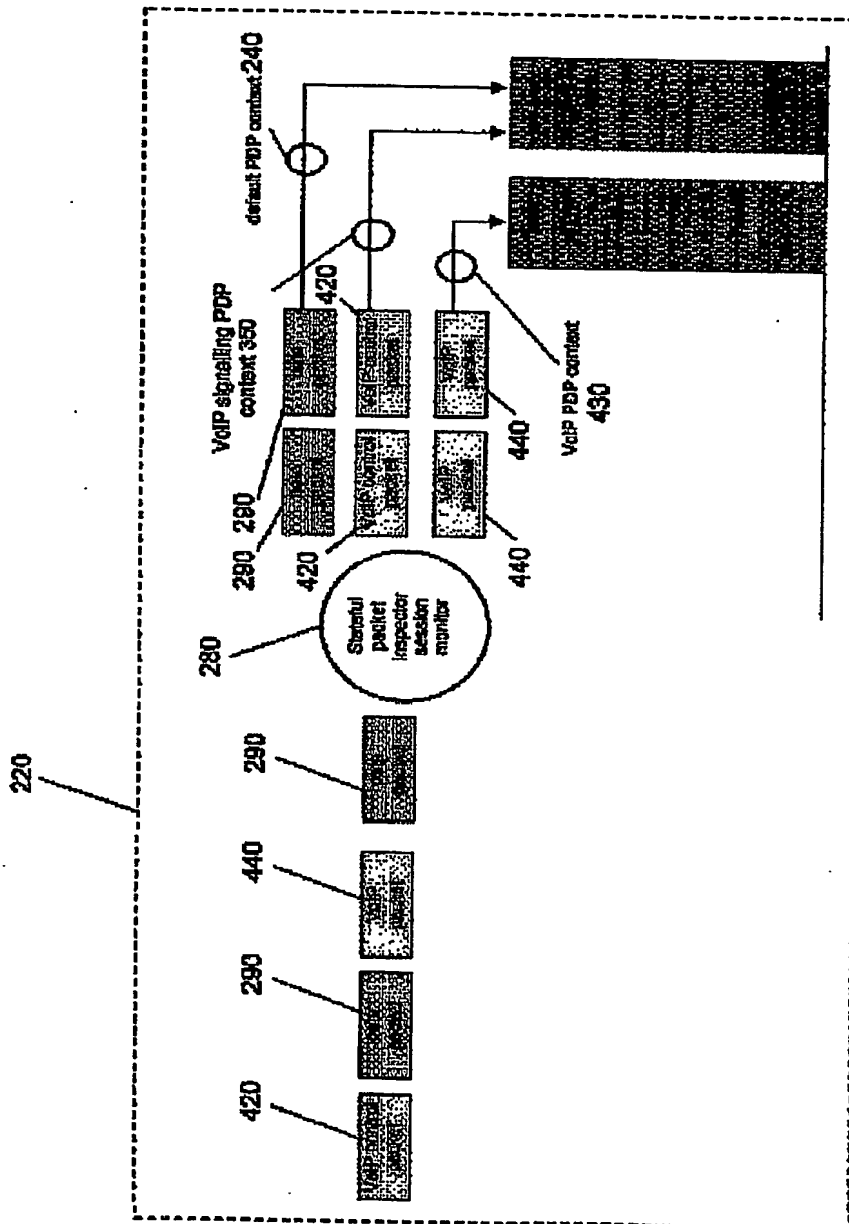


FIG. 10

9/10

02.073-1pw

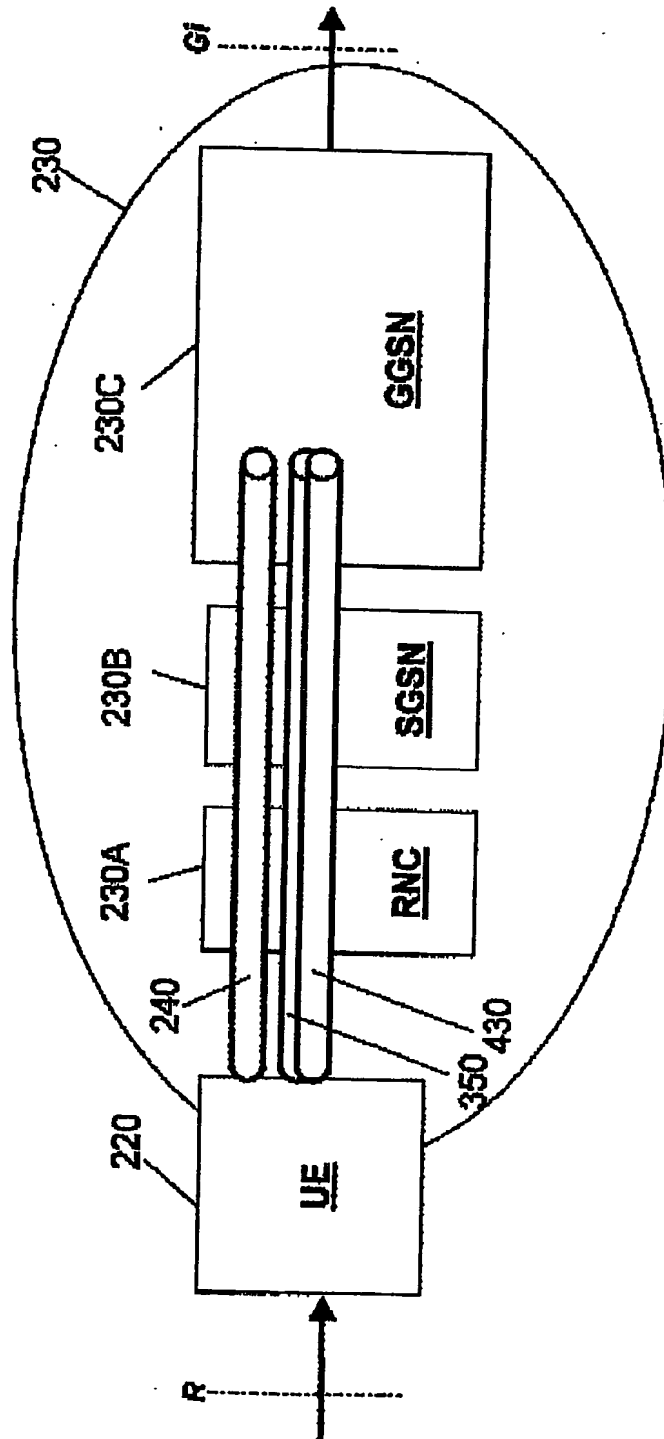


FIG. 11

02.073-1pw

10/10

FIG. 12


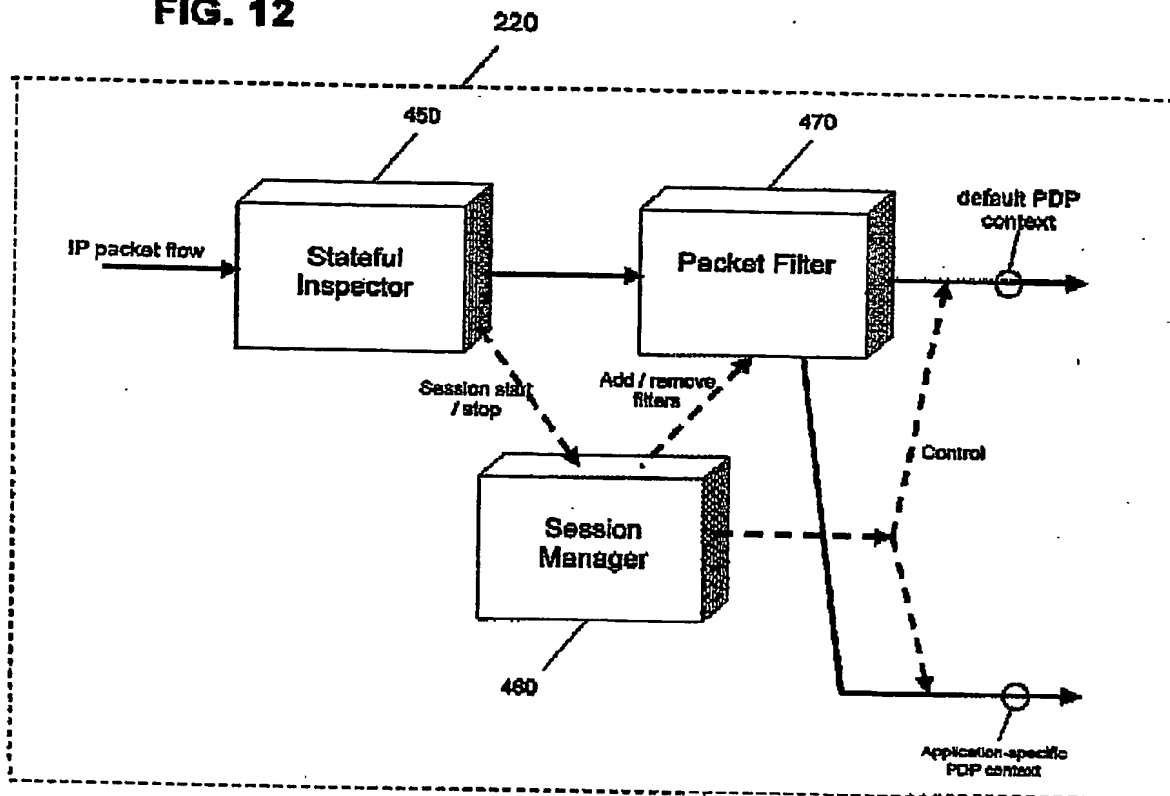


FIG. 13



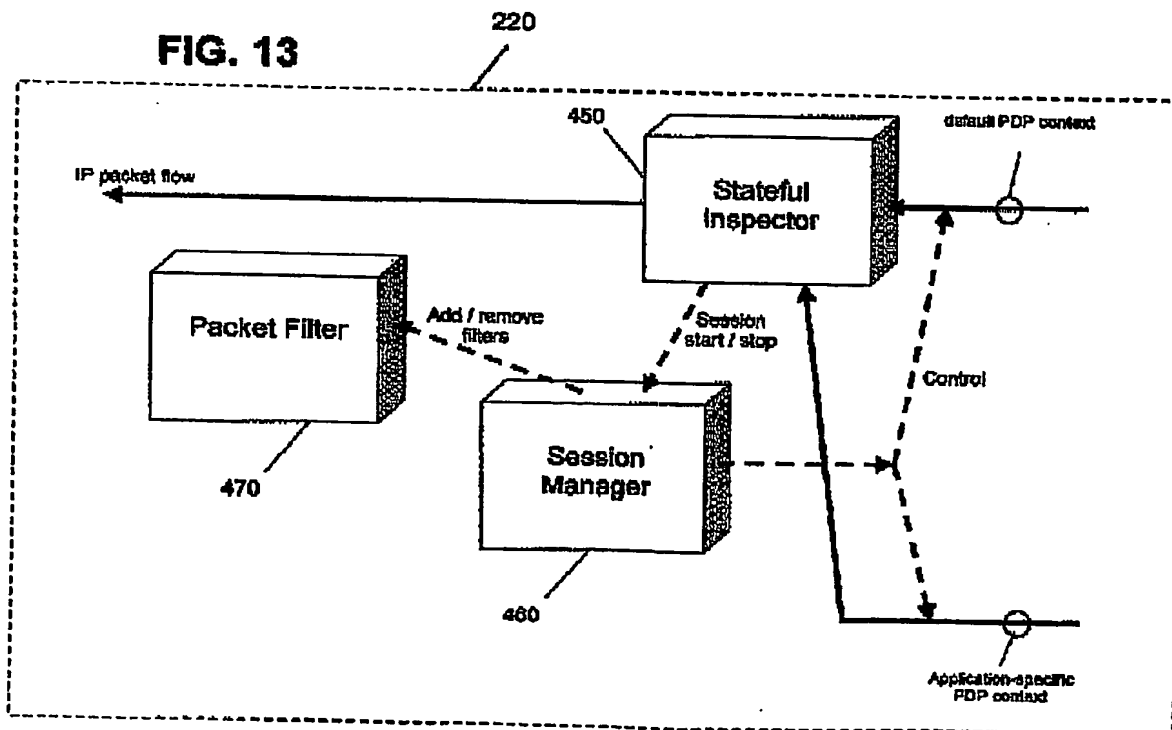

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☐ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**